COAXIAL SOLID-STATE

High Power Amplifier **ZHL-2425-250X+**

50Ω   250W   2.4 to 2.5 GHz

THE BIG DEAL
- High output power, 300W
- 2.4 to 2.5GHz ISM band
- Suitable for CW and pulsed signals
- High gain, 42 dB typical
- High efficiency, 60%
- High ruggedness
- Built-in monitoring and protection for temperature, current forward and reflected power
- User friendly I2C control interface

Generic photo used for illustration purposes only

Model No.	ZHL-2425-250X+
Case Style	VU3193
Connectors	MCX & N-Type

+RoHS Compliant
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

PRODUCT OVERVIEW

The ZHL-2425-250X+ is a new generation solid state connectorized high-power amplifier module which can be used in a wide range of industrial, scientific and medical applications in the 2400-2500 MHz ISM band. The ZHL-2425-250X+ provides many advantages over traditional magnetrons, such as longer lifespan, greater frequency tuning, better frequency stability, precise control of output power, and lower power supply voltage. This rugged amplifier is capable of amplifying signals (CW & pulsed) from 1W to 300W output power with built-in monitoring and protection for temperature, current, forward power, reverse power.

The amplifier has internal shutdown circuitry and integrated protection functions for added reliability under difficult operating conditions, making it virtually impossible to destroy both in single and multi-channel systems. The basic amplifier can be controlled externally with a few logic inputs or through a user friendly I2C control interface to monitor forward and reflected power to support dynamic load analysis, temperature, current, shutdown alarms, enabling the PA, and for resetting protection alarms. For advanced mode, users may consult the factory for more in-depth amplifier control commands, access to FWD/REFL power coefficients, and protection overrides.

KEY FEATURES

Feature	Advantages
High CW Power	Supports high power applications for a wide range of industrial, scientific and medical applications in the 2400 – 2500 MHz ISM frequency band. Power can be regulated accurately from 1W up to 300W (~P3dB, @+25C).
High Gain	A typical gain of 42 dB allows the ZHL-2425-250+ to be driven to full output power with commercially available integrated signal generators with a 14dBm output signal.
High Efficiency	The ZHL-2425-250+ uses high efficiency state of the art LDMOS technology. This combined with adaptive frequency control enables a high efficiency of typically 60% in most applications.
Built-in protection	The amplifier has built-in monitoring and protection for temperature, current, forward power, reverse power, and internal shutdown circuitry for added reliability under difficult operating conditions. When the prestored limits shown in the protection limits table are exceeded the amplifier will shut down.
Ruggedness	The amplifier has excellent reverse isolation and ruggedness with an onboard circulator. Reverse power is monitored, and the amplifier is shut down when the reverse power exceeds the prestored limits shown in the protection limits table.
Forward & Reverse Power detection	The amplifier features integrated couplers and detectors for Forward (FWD) and Reflected (REFL) power detection. FWD and REFL power detection supports accurate RF power measurements as well as dynamic load analysis and can be used to control or shut-off the amplifier by using the internal monitoring or an external controller.
Easy interfacing	Easy access to the amplifiers analog and digital (I2C) data, enabling dynamic ISM applications with either single or multiple modules to be controlled.
Small and lightweight	With a small footprint (55.9mm x 171.5mm x 15mm) the lightweight (0.29 kg) modular design is flexible for single or multiple amplifier system integration.
Cooling	The amplifier can either be air or water cooled. Mounting screw holes are available on the amplifier.
Low voltage	The ZHL-2425-250+ is powered by a low 32V supply.

REV. OR
ECO-010918
ZHL-2425-250X+
MCL NY
211207

www.minicircuits.com   P.O. Box 350166, Brooklyn, NY 11235-0003   (718) 934-4500   sales@minicircuits.com   PAGE 1 OF 11

High Power Amplifier ZHL-2425-250X+

ELECTRICAL SPECIFICATIONS AT +25°C, 32V, 50Ω SYSTEM, 3.3V LOGIC LEVELS

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Units
Frequency Range	f		2400		2500	MHz
Input Power	Pin	f=2400 MHz to 2500 MHz	—	12.5	15	dBm
Output Power	P_{OUT}	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	250	300	—	Watts
			54	54.8	—	dBm
Power Gain	G_P	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	40	42	—	dB
Gain Flatness	G_{FLAT}	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	—	0.5	1.0	dB
Efficiency	η	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	52	60	—	
Input VSWR	I_VSWR	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	—	1.9:1	2.3:1	
Operating Voltage	V_{DC}	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	31.5	32	32.5	V
Supply Current	I_{DC}	@P_{IN}_Typ., f=2400 MHz to 2500 MHz	—	16	18	A
Temperature Sense (based on analog output)	T_{sense}	T_{sense}=(-72.183 x TEMP_AOUT)+187.04 (TEMP_AOUT is the analog voltage on pin 8 of the conn. J2, temperature can also be read thru I2C)				°C
Supply Current Typical (based on analog output)	Icurrent	Icurrent = (6.21 x ISENSE_AOUT)-0.01 (ISENSE_AOUT is the analog voltage on pin 6 of the conn. J2, current can also be read thru I2C))				A
PA On / Off	–	Enable (TTL low) / Disable (TTL high) on Pin 5 of Connector J2				

PROTECTION LIMITS[1]

Parameter	Symbol	Min.	Max.	Units
Temperature Sense [3,4]	T_{sense}	–	65	°C
Reverse Power	REFL_POWER_A	–	200	Watts
			53	dBm
Voltage Supply	VDS_SENSE_A	24	40	V
Current Supply	ISENSE_A	—	18	A

MAXIMUM RATINGS[2]

Parameter	Ratings
Operating Temperature [3,4]	0°C to +65°C
Storage Temperature	-20°C to +85°C
DC Voltage	40V
Input RF Power (no damage)	+15 dBm
Power (reflected or other RF source) into the RF output conn. (no damage)	200W

1. When the prestored limits are exceeded, the amplifier will shut-down and remain disabled until a reset command is sent thru the I2C interface or by applying a logic high level to pin 3 of connector J2.
2. Specifications apply to CW signals only. Permanent damage may occur if any of these limits are exceeded.
3. This is the sensed operating temperature calculated from the analog output or read thru I2C.
4. There is an offset from the temperature measured at the temp. sense location to the amplifier pallet base of approximately +10°C. I.e. When the internal sensed temperature read thru I2C from the PA is 65°C then the temperature at the base of the pallet is approximately . +75°C.

High Power Amplifier ZHL-2425-250X+

APPLICATION

The ZHL-2425-250X+ amplifier module can be used as a building block in any single or multi-channel system for high power RF Energy applications such as:

- Industrial heating
- Materials processing
- Food processing (heating, tempering, and pasteurization)
- Microwave-assisted chemistry
- Plasma generation
- Plasma surface treatment
- Disinfection
- Chemistry
- RF-excited lasers
- Medical (heating, hyperthermia, and ablation)
- Semiconductor RF generators

BLOCK DIAGRAM
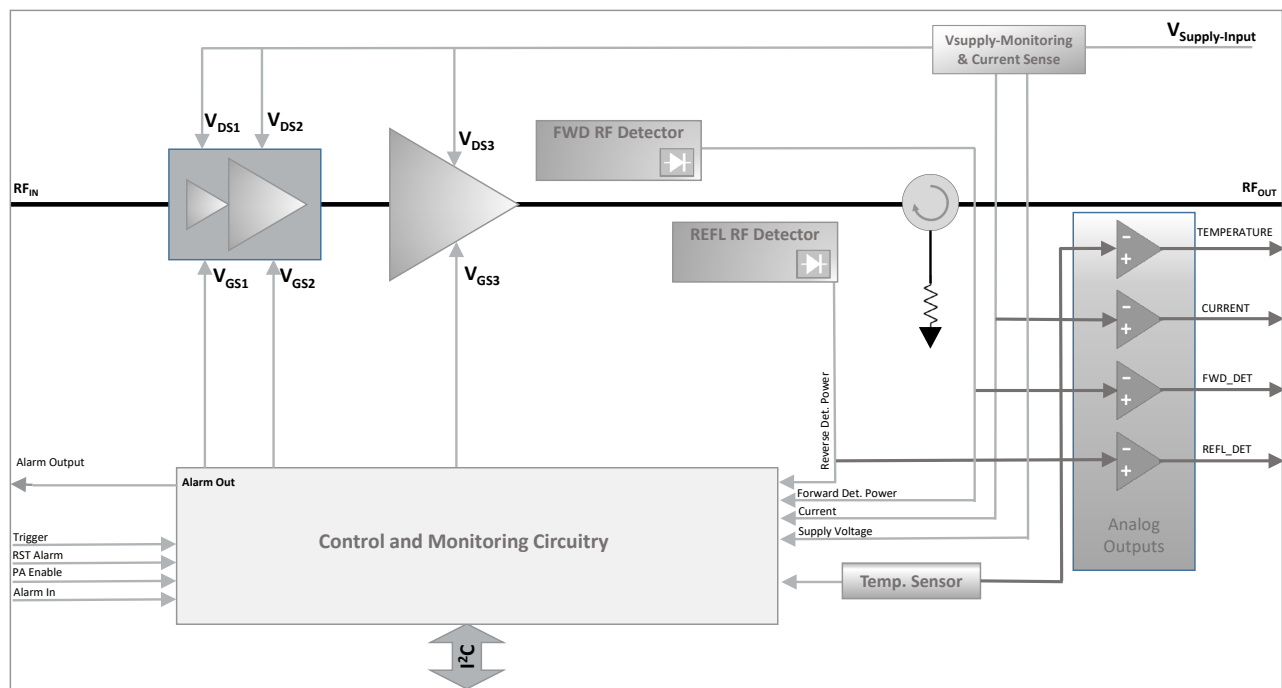
APPLICATION OVERVIEW

The ZHL-2425-250X+ can easily be driven by most standard signal generators, when connected to a DC power supply and mounted to a heat sink. The module is ready to deliver RF power to any applicator, i.e., a "device" to contain and/or apply the RF energy. The use of the latest generation solid state devices guarantee high efficiency, long lifetime, fully controllable and stable output power in a compact module outline. The amplifier has built-in monitoring and protection for temperature, current, forward power, reverse power, and internal shutdown circuitry for added reliability under difficult operating conditions, making it virtually impossible to destroy in single and multi-channel systems due to the integrated circulator and protection functions. When the prestored limits shown in the protection limits table are exceeded the amplifier will shut down and remain disabled until an alarm reset is sent either by an I2C command or a TTL high applied to pin 3 of the multi-pin connector J2. For advanced mode, users may consult the factory for more in-depth amplifier control commands, access to FWD/REFL power coefficients, and protection overrides.

There are two operation modes supported by the ZHL-2425-250X+

1. STANDARD OPERATION MODE (STDOM)
- PA Enable/Disable
- Built-in protection features enabled
- Ability to reset protection shutdown via I2C command or logic high on pin3
- Access to analog outputs for temperature, forward power, reverse power, and current that can be correlated to output power
- Access through the I2C to read Temperature ($^\circ$C), forward power (dBm or W), reverse power (dBm or W), supply voltage (V), and current (A)

2. ADVANCED OPERATION MODE (ADVOM)
- All of the "standard operation mode" features are available
- Access to the prestored protection limits for shutdown
- Access to enable/disable internal protection shutdown or change prestored internal shutdown limits (amplifier warranty is no longer valid in this situation).
- Access to all coefficients and digital data for forward detected power, reverse detected power, temperature, supply voltage, and current
- With either mode the external analog, digital signals, and control logic can optimize the RF vector (frequency, power, and time) depending on the application's needs in real time.

CONTROL INTERFACE PIN OUT AND FUNCTIONALITY (J2 MULTI-PIN CONNECTOR, 3.3V LOGIC LEVELS)

Pin Number	Label	Type	Functionality and Control
1	TRIG_IN		Used during pulse mode operation.
2	REFL_AOUT		Analog voltage (0 to 3.3V) that can be correlated to the level of the reflected power or power incident at the J5 connector.
3	RST_ALARM		Reset Alarm – Internal protection shutdown can be reset thru the I2C communication or applying a TTL high to this pin.
4	FWD_AOUT		Analog voltage (0 to 3.3V) that can be correlated to the level of the forward output power.
5	PA_ENABLE		Enable (TTL low) / Disable (TTL high). Normally low, enabled, and can be disabled when a TTL high is applied.
6	ISENSE_AOUT		Analog voltage (0 to 3.3V) that correlates to the amplifier current level
7	ALARM_IN		This can be used by a system controller or another ZHL-2425-250X+ amplifier to send an alarm input to shut down the amplifier. This pin is normally low and can be set to a TTL high to shut-down the amplifier.
8	TEMP_AOUT		Analog voltage (0 to 3.3V) that can be correlated to the temperature. See equation in electrical specification table
9	Do Not Connect		Reserved pin for manufacturer
10	Do Not Connect		Reserved pin for manufacturer
11	ALARM_OUT		When the protection limits are exceeded and the amplifier is shutdown, this pin will go from normally TTL low to TTL high. This output can be used by an external controller to shut down the system or can be connected to other ZHL-2425-250X+ amplifiers ALARM_IN pins to shut them down.
12	Do Not Connect		Reserved pin for manufacturer
13	SCL		I2C control
14	Do Not Connect		Reserved pin for manufacturer
15	SDA		I2C control
16	GND		Ground
17	Do Not Connect		Reserved pin for manufacturer
18	Do Not Connect		Reserved pin for manufacturer
19	Do Not Connect		Reserved pin for manufacturer
20	Do Not Connect		Reserved pin for manufacturer

I2C CONTROL AND BASIC COMMANDS (FIRMWARE VERSION A5)

The ZHL-2425-250X+ supports the I2C bus communication standard.
Up to 8 units can be connected on the same I2C clock and data lines with the same base address and different *unit addresses* through 3 address bits (A2-A0).

Up to 8 units can be connected on the same I2C clock and data lines with the same base address and different unit addresses through 3 address bits (A2-A0). All amplifiers from the factory are set to local unit address of 0 by default. See example 1 to set the individual unit address.

The I2C 8 bits *control address* is composed as follows:
   A base address of binary 1010 and 3 unit-address bits + a bit indicating a read or write operation: 1010 [A2][A1][A0][R/W];
   the default *control address* hence evaluates to 0xA0 for a write operation. A2-A0 represents the address bits where logic high = 1 and logic low = 0. For an I2C bus write operation, the last bit W=Write must be 0; For a read operation, the last bit R=Read must be 1.

CW AND PULSE MODE OPERATION:

The amplifier can be operated in CW or pulsed mode. In order to obtain the correct results from reading ADC values with registers 101(ADC_FWD), 103(ADC_REFL), 105(ADC_Current), 107 (ADC_VDS), and reading power, current, and voltage from registers 245(FWD_dBm) , 247 (REFL_dBm), 249 (Current_Amp), 251 (VDS_Volt) through I2C from the ZHL-2425-250X+ the register 132 (ADC_Trigger_Mode) must be set correctly for each mode. The register 132 should be set to 0 (default) for CW signal mode and set to >0 for PWM mode.

For PWM mode, Pin 1, TRIG_IN, must be used to trigger the internal measurement during the pulse. When the ADC_Trigger_Mode, register 132, is set to >1 and a trigger is issued to Pin 1 on the ZHL-2425-250X+ the firmware will wait for the delay time set in register 130 (delay_after_trigger) and then record ADC values correlating to forward power, reflected power, current, and supply voltage in a total time of approximately 32µs. To avoid any error from ripple in the beginning of the pulse the delay after trigger has been set to a default minimum of 30µs. Therefore, the pulse width should not be <62µs, this is with the average count (register 134) set to 1 and the delay after trigger (register 130) set to the default of 30µs. The Pulse Width must be greater than DelayAfterTrigger(30µs minimum) +(32 x Avg_Count) µs. The results from reading registers 101, 103, 105, 107, 245, 247, 249, and 251 will be the values recorded after the last external trigger.

For CW the ADC_Trigger_Mode, register 132, should be set to 0. No external trigger is required and average count and delay after trigger is not used.

I2C REGISTER ADDRESSES (REQUEST CODE) LOWER THAN 140:

Sending data to the device for that register range will always be by sending the register address followed by 2 bytes High and Low. Reading data will always be 2 bytes of reading High then Low bytes successively (big endian).

Example 1: Set the individual unit local address to 1   - options for local address are 0 to 7 – default local address is 0
1. I2C_Start
2. I2C_Write (I2C_Control_Address_W)   //control address - Write
3. I2C_Write (126)   //Address register to set the local address
4. I2C_Write (0)   //write high byte with value 0x00
5. I2C_Write (1)   //write low byte with value 0x01
6. I2C_Stop   // the new local address will be affected after next reset of the device

Example 2: Reset Alarm after internal protection shutdown event.
1. I2C_Start
2. I2C_Write (I2C_Control_Address_W)   //control address - Write
3. I2C_Write (102)   //Address register to set the reset code
4. I2C_Write (1)   //write high byte with value 0x01
5. I2C_Write (1)   //write low byte with value 0x01
6. I2C_Stop   // the amplifier logic will reset the unit

Example 3: Read ADC_FWD value (ADC value correlating to forward detected power).
1. I2C_Start
2. I2C_Write (I2C_Control_Address_W)   //control address - Write
3. I2C_Write (101)   //Address register to get the ADC_FWD value
4. I2C_Stop
5. I2C_Start
6. I2C_Write (I2C_Control_Adress_R)   //Control Address – Read
7. ByteH=I2C_Read()
8. ByteL=I2C_Read()
9. I2C_Stop

FOR I2C REGISTER ADDRESSES (REQUEST CODE) <u>140 AND ABOVE:</u>

Sending data to the device for this register range will always be by sending register address followed by <u>4 bytes</u> of data High to low. Reading data will always be <u>4 bytes</u> of data High to Low (big endian).

Example 4: Set the CAL frequency (i.e., the currently used frequency) for the frequency dependent data that will be read out later i.e., FWD_dBm, REFL_dBm. Parameters like Currrent_Amp, VDS_V, TFinal_deg do not depend on the current frequency used.
Set the I2CR_Set_CAL_freq to 2450 (Frequency is in MHz; 32bits float)
1. I2C_Start
2. I2C_Write (I2C_Control_Address_W)   //control address - Write
3. I2C_Write (240)   //Address register to set the cal_frequency value
4. I2C_Write (69)   // Byte4
5. I2C_Write (25)   // Byte3
6. I2C_Write (32)   // Byte2
7. I2C_Write (0)   // Byte1
8. I2C_Stop

Example 5: Get the output power in dBm at the frequency set in the previous example.
Get the I2CR_Get_FWD_dBm :
1.   I2C_Start
2.   I2C_Write (I2C_Control_Address_W) //control address - Write
3.   I2C_Write (245)   //Address register to get the FWD_dBm value
4.   I2C_Stop
5.   I2C_Start
6.   I2C_Write (I2C_Control_Adress_R)   //Control Address – Read
7.   Byte4=I2C_Read()
8.   Byte3=I2C_Read()
9.   Byte2=I2C_Read()
10.   Byte1=I2C_Read()
11.   I2C_Stop

REGISTER TABLE:

Register #	Label	Function
98	Set_I2C_BaseAddress	Set base address, valid values are: 0x90, 0xA0, 0xB0
99	Get_I2C_BaseAddress	Read base address
101	Read_ADC_FWD	Read the ADC value correlating to forward power.
102	I2C_RST_ALARM	Reset the alarm that caused a shutdown. DataByte_L=1 DataByteH=1
103	Read_ADC_REFL	Read the ADC value correlating to reflected or reverse.
105	Read_ADC_Current	Read the ADC value correlating to the DC current drawn by the PA.
107	Read_ADC_VDS	Read the ADC value correlating to the measured supply voltage.
111	Read_ADC_TFinal	Read the ADC value correlating to the temperature.
113	Get_FirmwareID	Read the current firmware ID
115	Get_FirmwareVersion	Read the current firmware version
119	Get_InternalAlarm_Cause	Read the internal alarm cause*
126	Set_I2C_LocalAddress	Set unit address bits [0-7]; requires unit reset to take effect
127	Get_I2C_LocalAddress	Read unit address
129	I2C_Get_AvgCount	Get Average count for reading ADCs when triggered.
130	I2C_Set_DelayAfterTrigger	For PWM operation, set delay after trigger before FWD_ADC,REFL_ADC, VDS_ADC, and Current_ADC values are read during the pulse and saved in firmware. Default set to 30µs.
131	I2C_Get_DelayAfterTrigger	For PWM operation, Read delay after trigger
132	Set_ADC_Trigger_Mode	Set 0 for "normal" reading during CW operation or positive number for Trigger Mode reading during PWM operation. (See para. CW and Pulse Mode Operation above)
133	Get_ADC_Trigger_Mode	
134	I2C_Set_AvgCount	For PWM operation, Set Average count for reading ADCs when triggered. Min. Average Count is 1 (default), Max. is 50.
240	I2CR_Set_CAL_freq	Set freq. in MHz for the data to be read from in registers 241, 245, 247
241	I2CR_Get_CAL_freq	Read Cal frequency in MHz
245	I2CR_Get_FWD_dBm	Read forward power in dBm (4byte floating point value)
247	I2CR_Get_REFL_dBm	Read reflect power in dBm (4 byte floating point value)
249	I2CR_Get_Current_Amp	Read amplifier current in Amps (4 byte floating point value)
251	I2CR_Get_VDS_Volt	Read Vsupply in volts (4 byte floating point value)
253	I2CR_Get_TFinal_deg	Read temperature in °C (4 byte floating point value)

*Internal Alarm Cause:
2 bytes value, each bit represents and alarm cause as follows. (bits 8 and 9 are reserved)

bit0: ADC_REFL_HighLimit
bit1: ADC_REFL_LowLimit
bit2: ADC_FWD_HighLimit
bit3: ADC_FWD_HighLimit
bit4: ADC_Current_HighLimit
bit5: ADC_Current_HighLimit
bit6: ADC_VDS_HighLimit
bit7: ADC_VDS_HighLimit
bit10: ADC_TFinal_HighLimit
bit11: ADC_TFinal_HighLimit
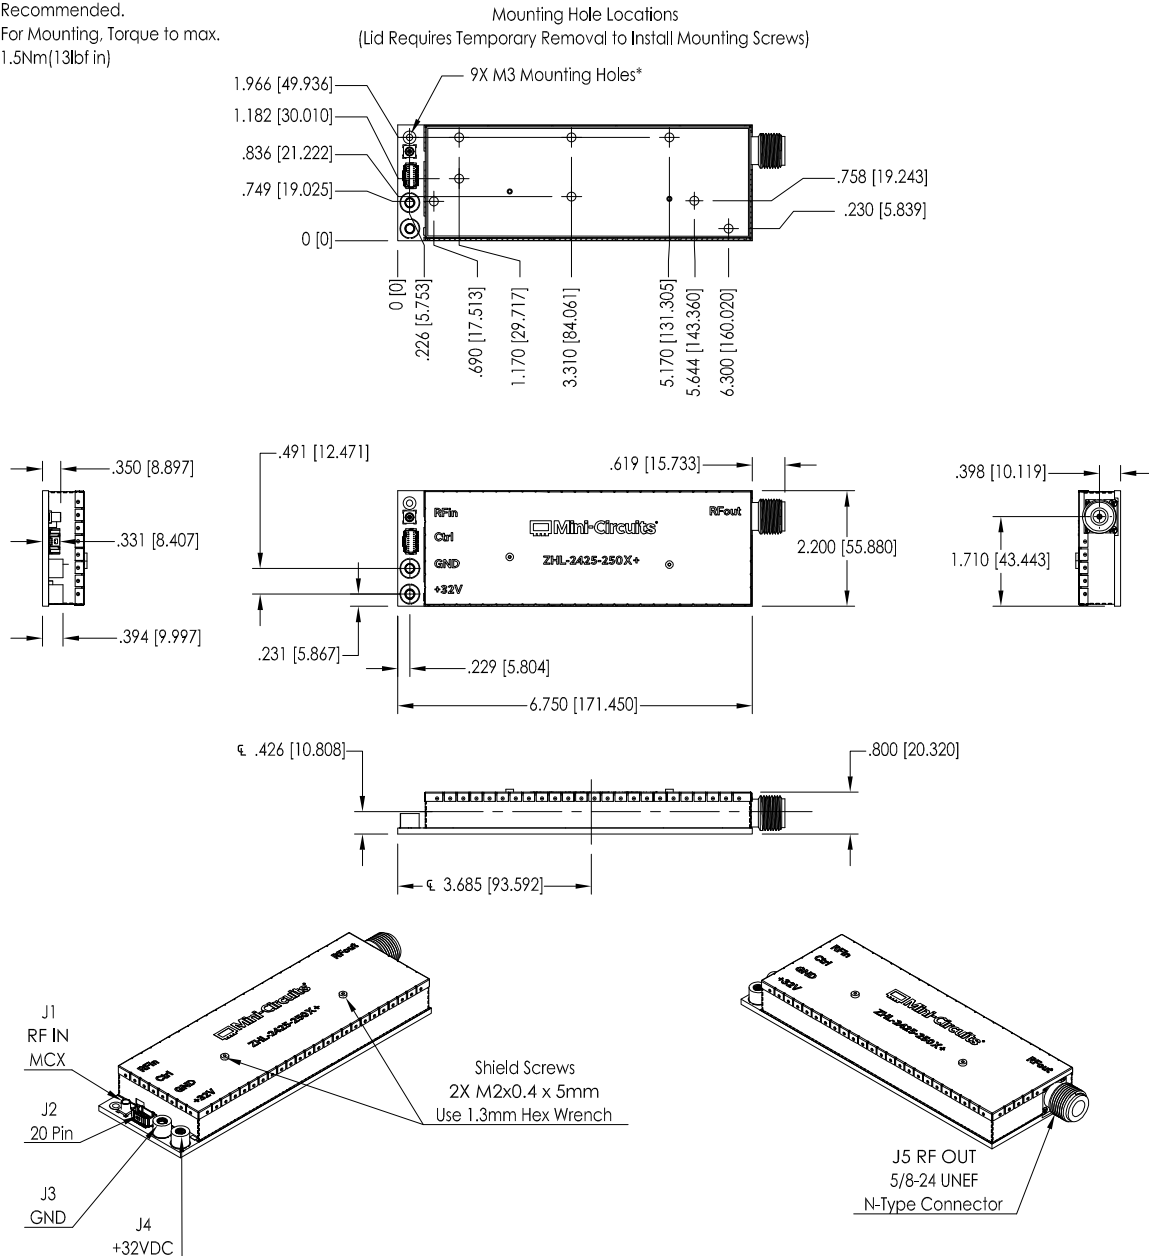bit12: FWD_ALARM
bit13: REFL_ALARM

High Power Amplifier ZHL-2425-250X+
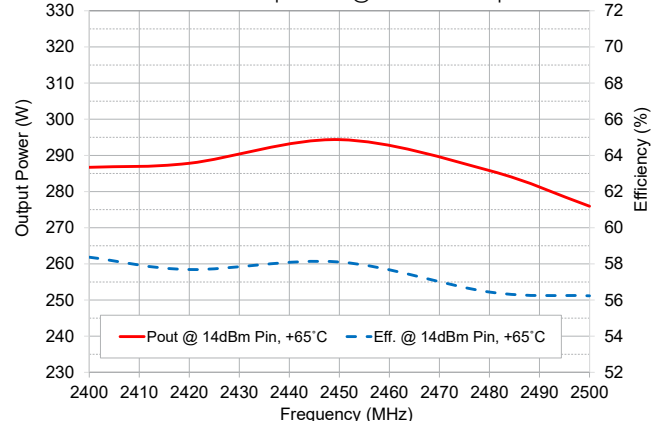
OUTLINE DRAWING

Weight: 290 grams;

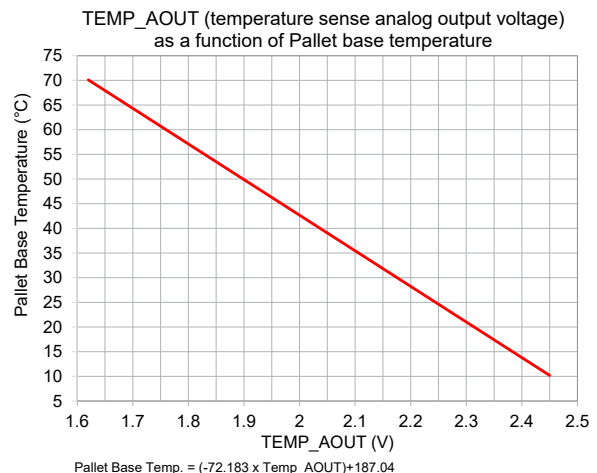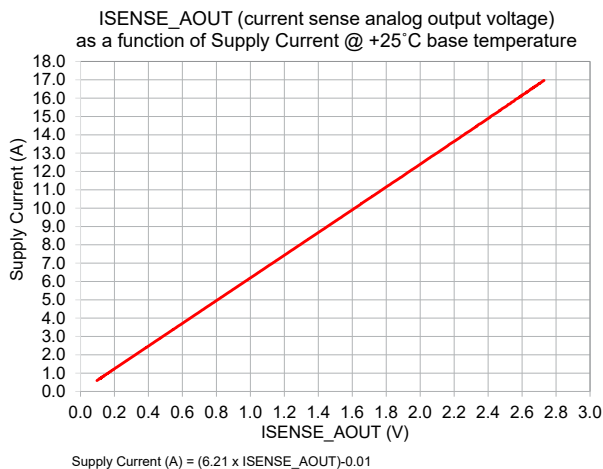Dimensions are in inches (mm). Tolerances: 2 Pl.±.01 (0.254); 3 Pl. ± .005 (0.127)

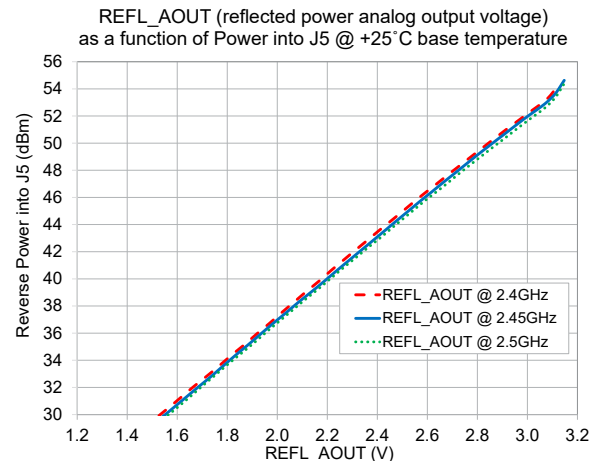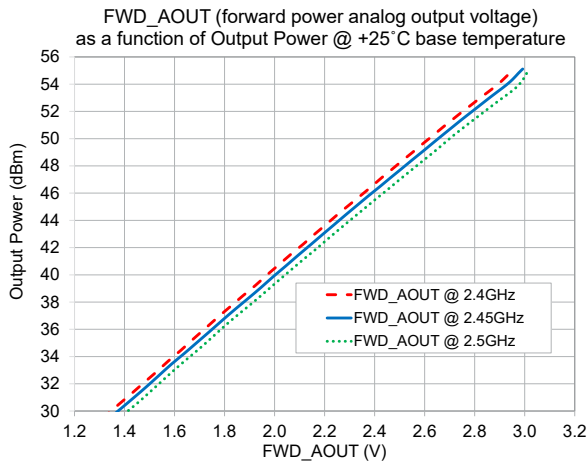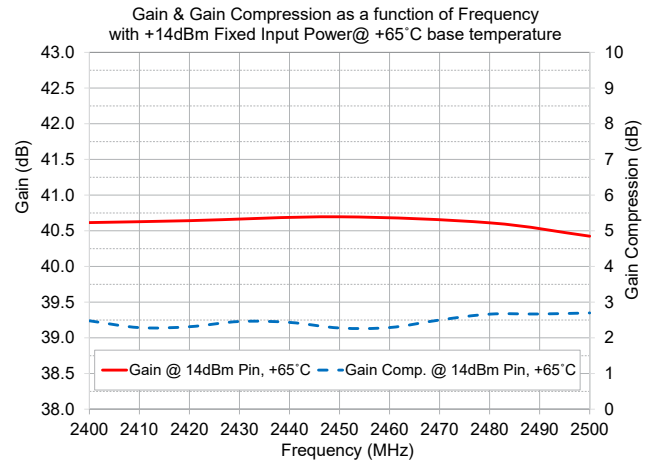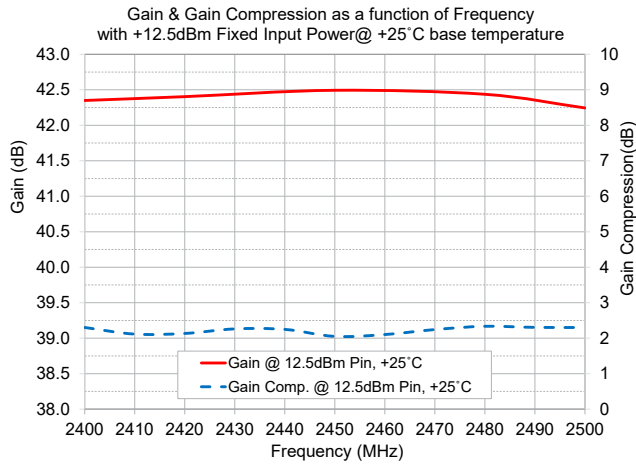# High Power Amplifier **ZHL-2425-250X+**

TYPICAL PERFORMANCE DATA (32V, 50Ω SYSTEM)

Gain & Efficiency as a function of Output Power (dBm) @ +25˚C base temperature
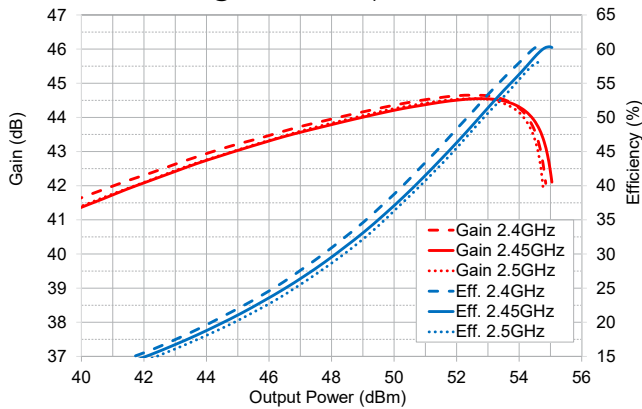
Gain & Efficiency as a function of Output Power (dBm) @ 2.45GHz for +25˚C & +65˚C base temperature
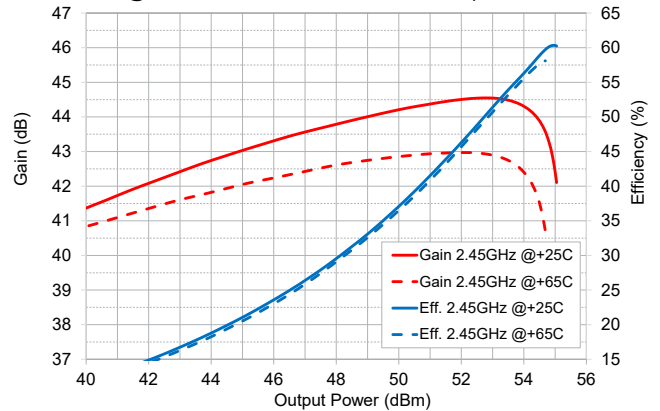
Gain & Efficiency as a function of Output Power (W) @ +25˚C base temperature
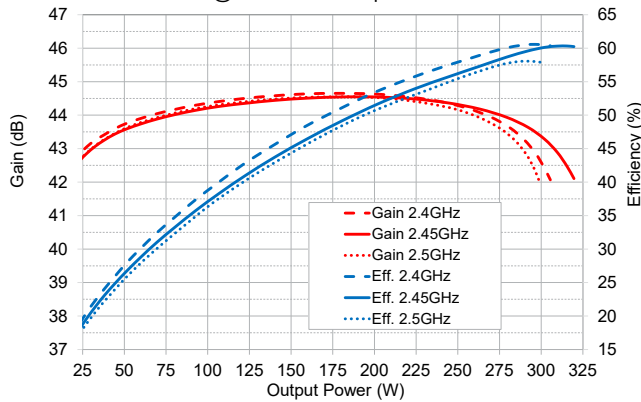
Gain & Efficiency as a function of Output Power (W) @ 2.45GHz for +25˚C & +65˚C base temperature
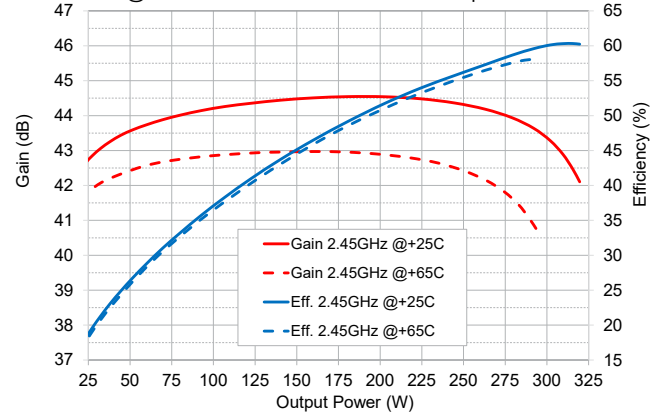
Output Power & Efficiency as a function of Frequency with +12.5dBm Fixed Input Power@ +25˚C base temperature
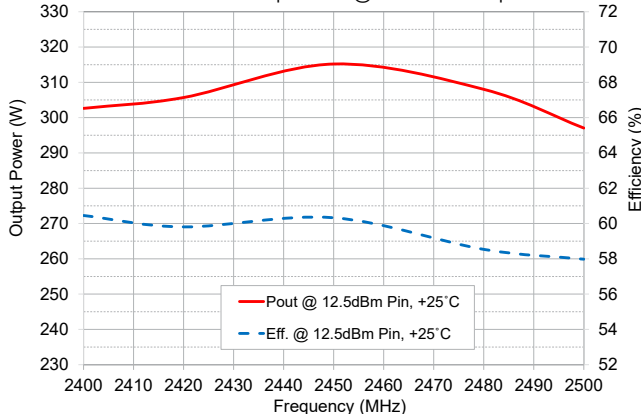
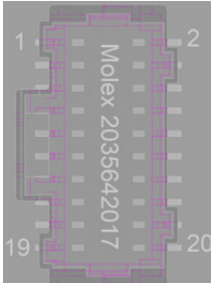Output Power & Efficiency as a function of Frequency with +14dBm Fixed Input Power@ +65˚C base temperature

TYPICAL PERFORMANCE DATA (32V, 50Ω SYSTEM)

Gain & Gain Compression as a function of Frequency
with +12.5dBm Fixed Input Power@ +25˚C base temperature

— Gain @ 12.5dBm Pin, +25˚C
‐‐ Gain Comp. @ 12.5dBm Pin, +25˚C

Gain & Gain Compression as a function of Frequency
with +14dBm Fixed Input Power@ +65˚C base temperature

— Gain @ 14dBm Pin, +65˚C ‐‐ Gain Comp. @ 14dBm Pin, +65˚C

FWD_AOUT (forward power analog output voltage)
as a function of Output Power @ +25˚C base temperature

‐‐ FWD_AOUT @ 2.4GHz
— FWD_AOUT @ 2.45GHz
···· FWD_AOUT @ 2.5GHz

REFL_AOUT (reflected power analog output voltage)
as a function of Power into J5 @ +25˚C base temperature

‐‐ REFL_AOUT @ 2.4GHz
— REFL_AOUT @ 2.45GHz
···· REFL_AOUT @ 2.5GHz

ISENSE_AOUT (current sense analog output voltage)
as a function of Supply Current @ +25˚C base temperature

Supply Current (A) = (6.21 x ISENSE_AOUT)-0.01

TEMP_AOUT (temperature sense analog output voltage)
as a function of Pallet base temperature

Pallet Base Temp. = (-72.183 x Temp AOUT)+187.04

AMPLIFIER INTERFACES AND SUGGESTED MATING HARDWARE*

	J1 - MCX Connector Jack, Female Socket 50 Ohm (Molex P/N 73415-1692) Mating CBL ASSY SMA female-MCX male RG316 6″, Amphenol RF P/N 245130-01-06.00 (other lengths avail.)
	J2 - Control Connector, 20 Pin (Molex 203564-2017) Mating connector shell, Molex 501189-2010, and cables with pre-crimped leads, Molex 79758-1018 or 79758-1019.
	J3 – Ground Conn., M5 J4 – +32V Supply Conn., M5 Tightening Torque 1.7 N-m (15 in-lbs) with max. of 2.15 N-m (19 in-lbs) Mating M5 screw (Mcmaster P/N 92095A308) Belville washer (Mcmaster P/N 90895A027) Ring Terminal (Mcmaster P/N7113K29)
	Output connector N-type female Recommended Torque for N-type connector mate is 1.36 N-m (12 in-lbs)

*Mating hardware not included with amplifier. Similar mating hardware available from other manufactures.